


# High Pressure Cleaner

## HD640

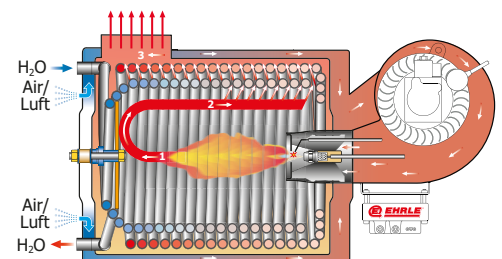

Type	HD640-Standard		HD640-Premium
Voltage	3/PE/AC/50Hz/400V	<ul style="list-style-type: none"> <li>Etronic I - Controls</li> </ul>	<ul style="list-style-type: none"> <li>Etronic I - Controls</li> </ul>
Operating pressure	30-200bar/3-20MPa	<ul style="list-style-type: none"> <li>10m HP-Hose DN08 - 315bar</li> </ul>	<ul style="list-style-type: none"> <li>Hose-Reel</li> </ul>
Max. pressure	220bar/22MPa	<ul style="list-style-type: none"> <li>Trigger-Gun with swivel</li> </ul>	<ul style="list-style-type: none"> <li>20m HP-Hose DN08 - 315bar</li> </ul>
Discharge capacity	300-600l/h	<ul style="list-style-type: none"> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> </ul>	<ul style="list-style-type: none"> <li>Trigger-Gun with swivel</li> </ul>
Nozzle size	030	<ul style="list-style-type: none"> <li>Stainless-Steel Jet-Nozzle 25°</li> </ul>	<ul style="list-style-type: none"> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> </ul>
Hot water capacity	30-98°C	<ul style="list-style-type: none"> <li>Water-Supply separation acc. water reg.</li> </ul>	<ul style="list-style-type: none"> <li>Stainless-Steel Jet-Nozzle 25°</li> </ul>
Pump speed	1400rpm	<ul style="list-style-type: none"> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>Spray-Lance 900mm c/w Rotary-Nozzle</li> </ul>
Connected load	4,6kW/8,0A		<ul style="list-style-type: none"> <li>Water-Supply separation acc. DIN EN 1717 class 4</li> </ul>
Electrical protection	3x16A slow		<ul style="list-style-type: none"> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Weight net/with package		157kg/185kg	167kg/195kg
Dimensions device/with package (LxWxH)		107x73,5x102cm/119x88x127cm	107x73,5x102cm/119x88x127cm

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: „Start-stop system with switch-off delay, total-switch-off after 20min“ 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar.

Art.No.	412001	412002
---------	--------	--------