




High Pressure Cleaner

HD1140



	1400 U/min	TSS
TOTAL STOP		
		
		

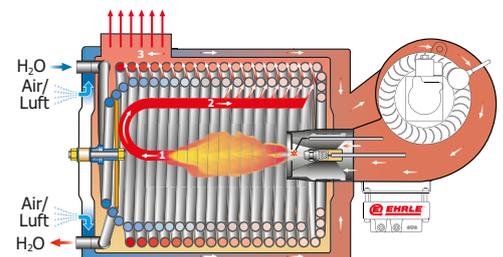

Type		HD1140-Standard	HD1140-Premium
Voltage	3/PE/AC/50Hz/400V	<ul style="list-style-type: none"> Etronic II - Controls 10m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Water-Supply separation acc. water reg. Chemical supply in high-pressure Jet c/w Metering-valve 	<ul style="list-style-type: none"> Etronic II - Controls Hose-Reel 20m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Spray-Lance 900mm c/w Rotary-Nozzle Water-Supply separation acc. DIN EN 1717 class 4 Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-230bar/3-23MPa		
Max. pressure	250bar/25MPa		
Discharge capacity	300-1000l/h		
Nozzle size	045		
Hot water capacity	30-98°C (150°C)		
Pump speed	1400rpm		
Connected load	7,6kW/13,3A		
Electrical protection	3x16A slow		
Weight net/with package		178kg/199kg	187kg/208kg
Dimensions device/with package (LxWxH)		107x73,5x102cm/119x88x127cm	107x73,5x102cm/119x88x127cm

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (Start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, low-water cut-off, low-fuel cut-off, optical flame monitoring with photoelectric cell and fault indicator-light, steam-stage) 2 motors system (independent of the direction of rotation) separately for H.P.Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar.

Art.No.	410001	410002
---------	--------	--------