

**NEW! HD523**



**EHRLE**<sup>®</sup>  
[www.ehrle.com](http://www.ehrle.com)

*The better way to clean*

**The new Compact-Class for professional H.P. Cleaning!**



308006-GB

# High Pressure Cleaner

Hot water, mobile, oil heated - Series Etronic I  
HD523

## HD cleaning with lance



Car cleaning with lance and stainless steel flat jet nozzle



High pressure cleaning with lance and stainless steel flat jet nozzle

## Pre-cleaning with attachment kit SoftFoam



Car cleaning with attachment kit SoftFoam lance, Art. No. 410702



Pre-spray with attachment kit SoftFoam lance, Art. No. 410702

## Floor cleaning with area cleaner




Area cleaner stainless steel in use Ø 300mm, Art. No. 394078



Area cleaner stainless steel Ø 410mm, Art. No. 394079

### 3 draft combustion chamber

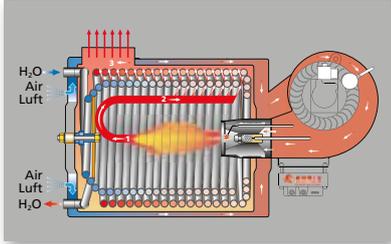

- 3 draft system for high efficiency
- 2 fold flame reversal
- horizontal firing technology
- Blue burner

### Brass Pump



- Triplex 3 piston pump
- Stainless steel piston
- Brass pump head
- Stainless steel valves

### 2 motors system



- Biodiesel suitable
- separate burner motor
- Fuel pump with pressure gauge
- large fuel filter
- Blue burner with high efficiency

### Storage tank

- Breakage and collision proof due to rotation technology
- 20 liters
- large filling spout
- ergonomic position

### Metal Chassis

- robust with collision protection
- 3 point landing gear
- galvanized sheet steel, powder-coated

### Classification system

- Hose drum with 15m HD hose
- Cable drum with 8m electric cable
- Deposit device for HD lance

### Temperature controller

- stepless temperature regulation
- ECO level

### Patented wheel brake

- Utility model 20 2010 004 954.7
- 3 jaws system
- Brakes on both sides

### On/Off switch

- 2 levels
- H.P. Pump
- Heating



## Technical data



<b>Type</b>		<b>HD523-Standard</b>
Voltage	1/N/PE/AC/50Hz/230V	<ul style="list-style-type: none"> <li>▶ Etronic I - Controls</li> <li>▶ 15m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm with Nozzle-Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Chemical supply with ND-Injector (optional)</li> <li>▶ Spray-Lance 900mm with Control-Nozzle (optional)</li> </ul>
Operating pressure	30-120bar/3-12MPa	
Max. pressure	140bar/14MPa	
Discharge capacity	300-600l/h	
Nozzle size	045	
Hot water capacity	30-98°C	
Pump speed	2800rpm	
Connected load	2,4kW/12,0A	
Electrical protection	13A slow-blowing	
Weight net/with package	118kg/139kg	
Dimensions device/with package (LxWxH)	1070x735x1020mm/1160x770x960mm	
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, high performance stainless steel piston, stainless-steel valves, leakage-return, Etronic I - controls: (Start-stop system with switch-off delay, total-switch-off after 20min) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain, with a patented wheel brake and swivel-castor, storage possibility for all accessories, integrated diesel-tank 22l, robust rotary on-off switch, 8m connection cable, removable ergonomic drawbar, Hose-reel for H.P. Hose and cord-reel for electric cord.</p>		
Art. No.	413001	



**Authorized Dealer**

**Ehrle GmbH**

Industriestraße 3  
D-89165 Dietenheim  
www.ehrle.com

Telefon +49 7303-1600-0  
Fax +49 7303-1600-600  
Email info@ehrle.com