


# High Pressure Cleaner

**HDB1240**

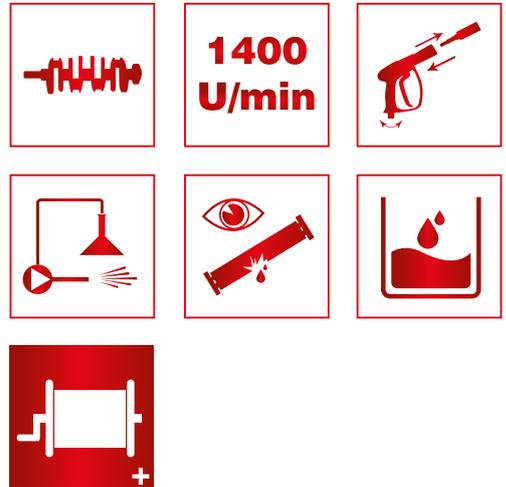

Type	HDB1240-Standard		HDB1240-Premium
Engine	Gasoline	<ul style="list-style-type: none"> <li>10m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Water-Supply separation acc. water reg.</li> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>Hose-Reel</li> <li>20m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Spray-Lance 900mm c/w Rotary-Nozzle</li> <li>Water-Supply separation acc. DIN EN 1717 class 4</li> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-180bar/3-18MPa		
Max. pressure	200bar/20MPa		
Discharge capacity	300-1000/h		
Nozzle size	050		
Max. Inlet temperature	30-98°C		
Pump speed	1400rpm		
Connected load	13h.p. Gasoline Honda		
Electric-Starter	Option		
Weight net/with package		216kg/229kg	224kg/237kg
Dimensions device/with package (LxWxH)		120x80x80cm/121x81x96cm	120x80x80cm/121x81x135cm

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of steel galvanized and powder-coated, triplex-piston pump with brass pump head, high-performance ceramic piston, stainless-steel valves, leakage-return, gearbox for reducing the high-pressure pump speed, separately driven burner motor for heating, 4-fold safety system, consisting of pressure-switch, unloader safety-valve c/w infinitely variable pressure and quantity regulation, safety-valve and thermostat, automatic load-idle speed control, 4 large rubber-pneumatic tires for rough terrain, storage possibility for all accessories, removable standard diesel-canister 20l, external 2-way detergent supply, removable ergonomic drawbar.

<b>Art.No.</b>	138001	138002
<b>Art.No. device with electric-starter</b>	139001	139002