


High Pressure Cleaner

HDE840-F

Food progressing
Hot water resistant

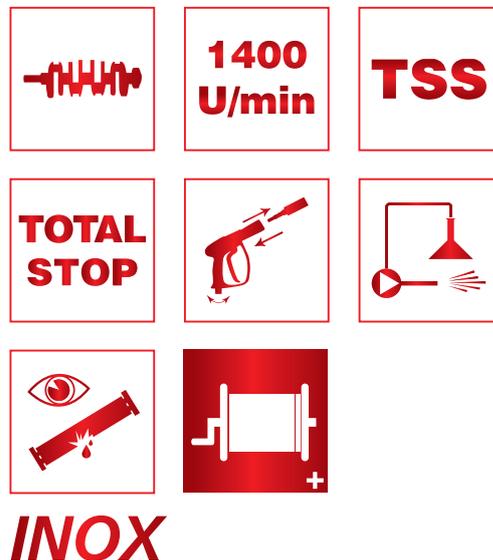

Type	HDE840-F 24kW Standard		HDE840-F 24kW Premium	
Voltage	3/PE/AC/50Hz/400V	<ul style="list-style-type: none"> Etronic I - Controls 	<ul style="list-style-type: none"> Etronic I - Controls 	
Operating pressure	30-140bar/3-14MPa	<ul style="list-style-type: none"> 10m HP-Hose DN08 - 315bar blue 	<ul style="list-style-type: none"> Hose-Reel 	
Max. pressure	160bar/16MPa	<ul style="list-style-type: none"> Trigger-Gun with swivel 	<ul style="list-style-type: none"> 20m HP-Hose DN08 - 315bar blue 	
Discharge capacity	300-720l/h	<ul style="list-style-type: none"> Double Spray-Lance 900mm c/w 	<ul style="list-style-type: none"> Trigger-Gun with swivel 	
Nozzle size	045	<ul style="list-style-type: none"> Nozzle-Protection 	<ul style="list-style-type: none"> Double Spray-Lance 900mm c/w 	
Heating capacity	24kW	<ul style="list-style-type: none"> Stainless-Steel Jet-Nozzle 25° 	<ul style="list-style-type: none"> Nozzle-Protection 	
Hot water capacity	30-80°C	<ul style="list-style-type: none"> Water-Supply separation acc. water reg. 	<ul style="list-style-type: none"> Stainless-Steel Jet-Nozzle 25° 	
Pump speed	1400rpm	<ul style="list-style-type: none"> Chemical supply in high-pressure Jet c/w 	<ul style="list-style-type: none"> Spray-Lance 900mm c/w Rotary-Nozzle 	
Connected load	28,8kW/44A	<ul style="list-style-type: none"> Metering-valve 	<ul style="list-style-type: none"> Water-Supply separation acc. 	
Electrical protection	3x50A slow		<ul style="list-style-type: none"> DIN EN 1717 class 4 	
Weight net/with package		124kg/145kg		133kg/154kg
Dimensions device/with package (LxWxH)		107x73,5x102cm/119x88x127cm		107x73,5x102cm/119x88x127cm
<p>Food progressing with abrasion resistant high pressure hose blue, self-supporting, robust, corrossions free, rotation-moulded device- chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation. Triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar stainless steel.</p>				
Art.No.		108003		108004